




## Kabel/Schienenwandler

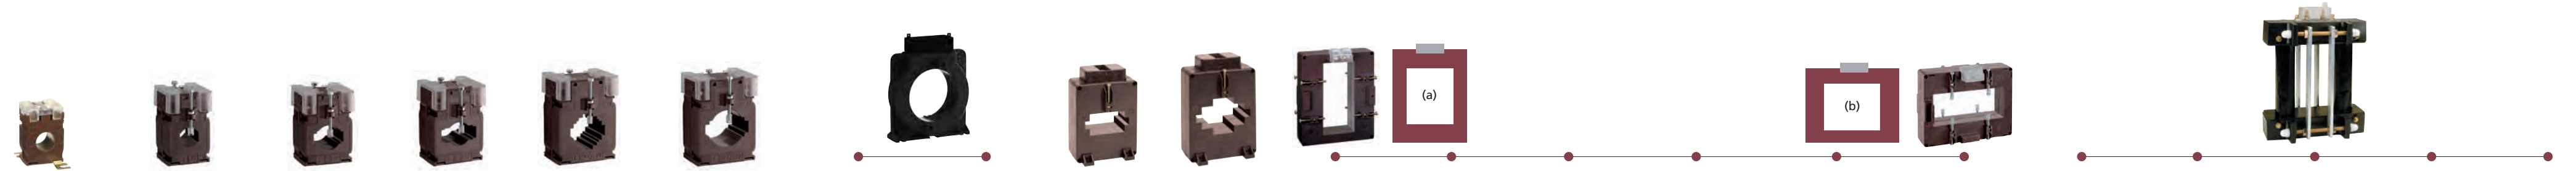

Model	TAIBB	TA221	TA327	TA426	TA432	TA540	TAC80	TAC110	TAS64	TAS81	TAS65	TAS84	TAS102	TAS102B	TAS127	TAS127B TAU9	TAU10	TAU11	TAU12	TAU13	TAU13
Code	TABB...	TA221...	TA327...	TA426...	TA432...	TA540...	TA08...	TA11...	TASL...	TASN...	(a) TASL... (b) TASL...3	(a) TASO... (b) TASO...3	(a) TAMP... (b) TAMP...3	(a) TAMQ... (b) TAMQ...3	(a) TASR... (b) TASR...3	(a) TASS... (b) TASS...3	TAUB...	TAUC...	TAUD...	TAUE...	TAUF...
Datenblatt	NT516	NT811	NT812	NT813	NT814	NT815	NT712	NT713	NT569	NT573	NT518	NT574	NT766	NT767	NT522	NT523	NT520	NT717	NT719	NT819	NT820
Type	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary	passing primary
Breite (mm)	44	49,5	56	60	70	70	125	165	90	100	90 (a) 94 (b)	96 (a) 116 (b)	98 (a) 129 (b)	135 (a) 129 (b)	99 (a) 160 (b)	125 (a) 160 (b)	177	257	257	177	257
Höhe (mm)	65	80	80	85	95	95	132	170	130	145	94 (a) 90 (b)	116 (a) 96 (b)	129 (a) 98 (b)	129 (a) 135 (b)	160 (a) 99 (b)	160 (a) 125 (b)	273,5	233,5	273,5	333,5	333,5
Kabel (mm)	Ø21	Ø21	Ø27	Ø26	Ø32	Ø40	Ø80	Ø110													
Fenster (mm)	16x12,5	20,5x10,5	25,5x15,5 32,5x10,5	32,5x15,5 40,5x12,5	25,5x25,5 32,5x20,5 40,5x10,5	40,5x20,5 50,5x12,5			51x31 64x11	64x31 81x11	32x65 (a) 65x32 (b)	34x84 (a) 84x34 (b)	38x102 (a) 102x38 (b)	54x102 (a) 102x54 (b)	38x127 (a) 127x38 (b)	54x127 (a) 127x54 (b)	55x165	120x125	120x165	55x225	120x225

Primär Strom	VA			VA			VA			VA			VA			VA			VA			VA			VA			VA			VA			VA			VA			VA			VA		
	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3	cl.0,5	cl.1	cl.3						
40A			1																																										
50A		1,25	1,5			2,5																																							
60A		1,25	2			1,5	3																																						
70A		1,5	2,5			1,5	4																																						
75A		1,5	2,5			2	4																																						
80A		1,5	2,5			3	4																																						
100A		2	2,5	3,5		3	4																																						
120A		2,5	3,5	4		3	4																																						
125A		2,5	3,5	4		3	4																																						
150A		3	4	5		4	6																																						
160A		3	4	5		4	6																																						
200A		4	5,5	6		6	8																																						
250A		5	6	7		8	10																																						
300A		6	7,5	8		8	10																																						
400A						10	12																																						
500A						12	15																																						
600A						15	20																																						
700A																																													
750A																																													
800A																																													
1000A																																													
1200A																																													
1250A																																													
1500A																																													
1600A																																													
2000A																																													
2500A																																													
3000A																																													
3200A																																													
4000A																																													
5000A																																													
6000A																																													
8000A																																													
code see page		20				20																																							